

PISCES FISH MACHINERY, Inc.

FR-150/200/275

The FR-150/200/275 are reliable, versatile, high-speed filleting units specially designed for the production of single fillets free of backbone and ribs. Infeed systems for either eviscerated or non-eviscerated fish are available.



**FR-200 MAXIMUM RIB LENGTH 50MM/2IN.
FR-275 MAXIMUM RIB LENGTH 75MM/3IN.**

METHOD OF OPERATION

Head-off un-gutted fish or gutted fish with the belly open is fed onto the feed guide, then the fish is transported by drive belts over the belly cutting blades and belly cleaning wheel and past the backbone removal blades.

The backbone and offal are ejected out of the bottom of the machine. The fillets continue to the rib removal blades, ribs are then removed from the fillets and ejected out of the bottom of the machine. Fillets exit at the outfeed of the machine.

**SPECIFICALLY DESIGNED
TO PRODUCE HIGH-YIELD FILLETS
FROM FISH IN THE SIZE RANGE;
FR-150 FROM 500 G TO 1.5 KG, UP TO
50 FISH / MINUTE DEPENDING ON
THE SPECIES. FR-200/275 FROM 1 KG
TO 4 KG, UP TO 40 FISH / MINUTE
DEPENDING ON THE SPECIES.**



KEY FEATURES

- High yield and production rates
- Open Hygienic design
- Gentle fish handling
- Easy to operate and maintain
- Low operating and maintenance costs
- Robust design
- Small footprint
- Easy and fast adjustment for different fish size


WIDE RANGE OF SPECIES

FR-150 Lake perch, bass, trout, bream, garfish and other similar species.

FR-200/275 Trout, ocean perch, lake perch, redfish, tilapia, whitefish, walleye, mullet, salmon, mackerel, bass, sea bass, sea bream and other similar species.

HIGH-YIELD FILLETING

piscès-ind.com

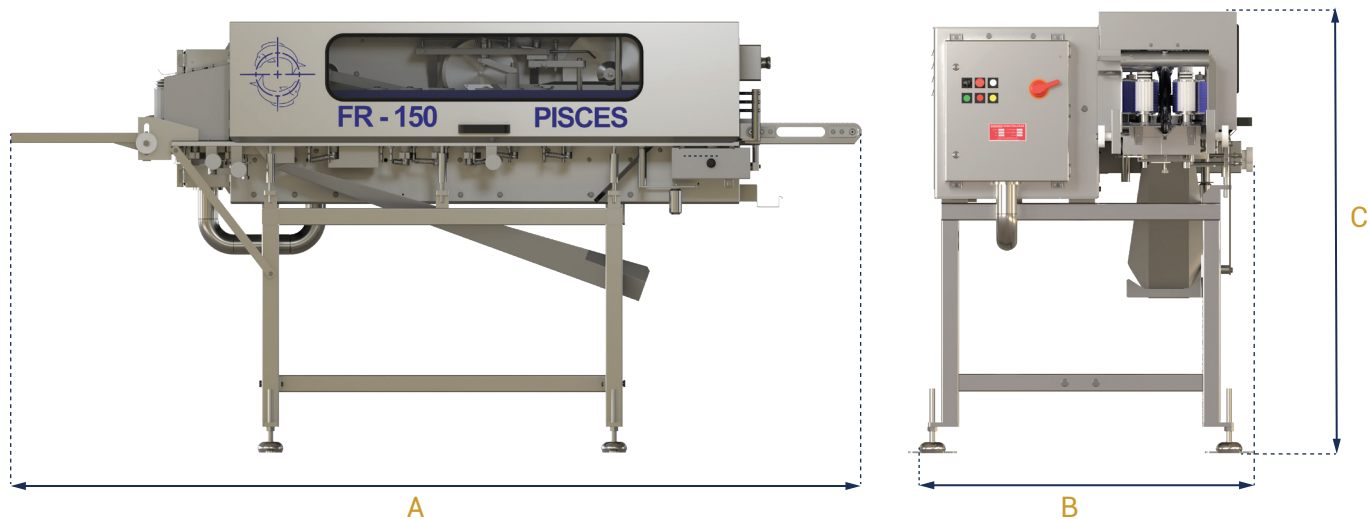




FR-150	A	B	C
mm	2185	927	1238
in	86	37	49

FR-200	A	B	C
mm	2492	957	1270
in	98	38	50


FR-275	A	B	C
mm	2329	956	1321
in	92	38	52

These are indicative values.
Detailed drawings are available on request.

Exclusively Devoted to the Fish Processing Industry

Utilities	
	Standard Garden Hose Connection 1/2" 12 Liters/minute (3 US gallon/minute)
	Per customer specifications, single or three phase available 3 Kw (4.02 Hp)
	1

Specifications subject to change without notice. This machine is subject to U.S. and International patents and meet all CE machine directives.



PISCES FISH
MACHINERY, Inc.

P.O. BOX 189

WELLS, MICHIGAN 49894 TEL: 906/789-1636

FAX: 906/789-1211

E-MAIL: pisces@pisces-ind.com

WEB: www.pisces-ind.com